

Digital Transformer Ratiometer

Model 8510

FEATURES

- ▶ Measures power transformers, VT/PTs, and current transformer CT turns ratios
- ▶ Direct turns ratio readings from 0.8000:1 to 8000.0:1
- ▶ Tests performed by exciting the primary and reading the secondary; provides safer conditions for the operation
- ▶ Displays turns ratio, excitation current, winding polarity and % deviation from the nameplate values
- ▶ Internal NiMH battery packs provide up to 10 hours of continuous operation
- ▶ Smart/fast battery charger with universal input voltage (100-24V, 50-60Hz) charges batteries in less than 4 hours
- ▶ Display warns of incorrect lead connection, reverse polarity, open and short circuits
- ▶ Includes DataView® analysis software for onfiguring, downloading, storing, and report generation of test data



Our products are backed by over 130 years of experience in test and measurement equipment, and encompass the latest international standards for quality and safety.

 **Technical Hotline: (800) 343-1391**
 **www.aemc.com**

 **AEMC®**
INSTRUMENTS
CHAUVIN ARNOUX GROUP

MODEL 8510



FEATURES

- ▶ Measures power transformers, VT/PTs and current transformer CT turns ratios
- ▶ Displays turns ratio, excitation current, winding polarity, and % deviation from the nameplate values
- ▶ Smart/fast battery charger with universal input voltage (100-240V, 50-60Hz) charges batteries in less than 4 hours
- ▶ Ratio test results in less than 7 seconds
- ▶ Internal NiMH battery packs provide up to 10 hours of continuous operation
- ▶ Tests performed by exciting the primary and reading the secondary; provides safer conditions for the operator
- ▶ Display warns of incorrect lead connection, reverse polarity, open and short circuits
- ▶ Easy connection and test setup; no calibration or balancing required
- ▶ Large dual display with adjustable contrast ensures clearer visibility in any lighting environment day or night
- ▶ Low battery indicator
- ▶ Includes 15 foot lead set
- ▶ Stores up to 10,000 test results in internal memory automatically or by user selection
- ▶ Filter selection to improve test results in electrically noisy environments
- ▶ USB port facilitates configuring the instrument and downloading test results
- ▶ Includes DataView® software for instrument configuration, data storage, analysis, and report generation

APPLICATIONS

- ▶ Power transformers
- ▶ Potential transformers
- ▶ Current transformers

Product 2136.50 Includes

- NiMH batteries (installed)
- 115V power cord
- Set of 2, 15ft leads
- 10ft USB cable
- External battery charger
- Soft carrying case

Accessories/Replacement Parts

- 2136.76 Set of 2, 30ft leads for use with DTR® Models 8500 & 8510
- 2136.77 Set of 2, 15ft leads for use with DTR® Models 8500 & 8510

SPECIFICATIONS

ELECTRICAL		
Ratio Range (VT/PT)	Auto-Ranging: 0.8000 to 8000:1	
Accuracy (VT/PT)	Ratio Range	Accuracy (% of Reading)
	0.8000 to 9.9999	± 0.2%
	10.000 to 999.99	± 0.1%
	1000.0 to 4999.9	± 0.2%
	5000.0 to 8000.0	± 0.25%
Ratio Range (CT)	Auto-Ranging: 0.8000 to 1000.0	
Accuracy (CT)	Ratio Range	Accuracy (% of Reading)
	0.8000 to 1000.0	± 0.5%
Excitation Signal	VT/PT Mode: 32Vrms max; CT Mode: Auto Level 0 to 1A, 0.1 to 4.5Vrms	
Excitation Current Display	Range: 0 to 1000mA; Accuracy: ± (2% of Reading + 2mA)	
Excitation Frequency	70Hz	
Ratio Test Time	<7 seconds	
CONT/Ratio Test Time	<35 seconds	
Display	Dual line alpha-numeric LCD, 16x2 characters with contrast adjustment and backlight control. Day/night visible.	
Languages Supported	English, Spanish, French, Italian, German, Portuguese	
Measurement Method	In accordance with IEEE Std C57.12.90™-2006	
Power Source	Two 12V, 1650mAH NiMH rechargeable battery packs	
Battery Life	Up to 10 hrs of continuous operation. Low battery indication.	
Battery Charger	Universal input (90 to 264Vrms input) smart recharger	
Charging Time	<4 Hrs to full charge	
Data Storage	10,000 tests	
Date/Time	Battery-backed, Real-time clock	
Communication	USB. 2.0 compliant, optically isolated, 115.2 KB	
Software	DataView® analysis software included	
MECHANICAL		
Dimensions	10.70 x 9.76 x 5.12" (272 x 248 x 130 mm)	
Weight	8.1 lbs (3.7kg)	
Connection	XLR connectors	
Leads	15 ft (4.6m) H & X shielded with color-coded alligator clips	
Enclosure	Heavy duty Polypropylene case, UL 94 V0 rated	
Vibration	IEC 68-2-6 (1.5mm to 55Hz)	
Shock	IEC 68-2-27 (30G)	
Drop	IEC 68-2-32 (1m)	
Index of Protection	IP 40 (Instrument lid open) per EN 60529: IP 53 (Instrument lid closed) per EN 60529	
SAFETY		
CE Mark	Yes	
Double Insulation	Yes	
Safety Ratings	EN 61010-1; 50V CAT IV; Pollution Degree 2	



CONSTRUCTION

16 character by 2 line
backlit display

USB port

High-side "H" cable connector

Function keys for programming
& displaying results

Low-side "X" cable connector

USE SPECIFIED
CHARGER ONLY

Battery charge input connector

OFF/
CHARGE
ON

Power switch

Operation and low battery indicator

CONTRAST

Display contrast adjustment

MEM
ENTER

Backlight (☼) control button

TEST

Test button



DISPLAYS

```
UT/PT CONT N M
F19920 s7200
```

Main display

```
Test Mode
CONT/Ratio
```

Easy selection of test mode

```
Ratio: 12.187:1
C: 1mA D: 1.55%
```

Test results displayed

```
OBJ#:01 Test#:01
F19920 s7200
```

Store test results into internal memory

```
Check for H<>X
Cable Reversal
```

Clear indication errors in connection
and other conditions

```
PRI : 19920
SEC : 7200
```

Program and store up to 10 nameplate ratios



The DTR® Model 8510 is a portable digital transformer ratiometer designed for on-site testing of power, potential, and current transformers. When connected to a non-energized transformer, the DTR® accurately measures primary to secondary turns ratio, while simultaneously displaying polarity and excitation current.

The Model 8510 is a second-generation instrument incorporating the latest technology, improving on its highly successful predecessor the Model 8500.

The DTR® is fully automatic and uses the IEEE C57.12-90™-2006 test method. No user calibration, range selection, hand cranking, or tedious balancing is required. At each measurement, the DTR® automatically checks for open windings, connections, circuit breakers, short circuits (excess excitation current), incorrect test lead placement, and reverse polarity. Measurements are displayed quickly and accurately.

The DTR® is designed with operator safety in mind. Tests are performed at low voltage and, unlike other ratiometers, step-down excitation is employed. This method, in conjunction with an integral H/X reverse protection circuit, guards against the generation of hazardous test voltages normally associated with other transformer ratio measurement instruments.

A large, dual line alphanumeric LCD with adjustable contrast and backlight guarantees day/night readability. Power is supplied by integral NiMH battery. Batteries are charged by an external smart charger. Both rugged and reliable, the Model 8510 is built into an attractive, sealed structural polypropylene case designed to withstand the rigors of field use.

Up to 10,000 tests can be stored in the DTR®'s internal memory and downloaded to a PC for analysis and report generation using the included DataView® software.

Constructed using only the highest quality electrical and mechanical components, the DTR® sets the standard in advanced design, engineering and workmanship, and it will provide the user with years of accurate and reliable measurements and hassle free test report printouts.

The Digital Transformer Ratiometer DTR® Model 8510 is a lightweight, rugged, portable instrument designed for on site testing of power, potential and current transformers. Operation of the DTR® 8510 is fully automatic. No user calibration, range selection, hand cranking or tedious balancing is required. The DTR® 8510 utilizes an advanced, low-voltage, step-down measurement technique in which the high voltage "H" windings are subjected to test excitation. This results in greater operator safety and the ability to test a much wider array of transformer types and sizes.




DataView[®]



FEATURES

- ▶ Display and analyze data on your PC
- ▶ Configure DTR[®] Model 8510 functions and parameters from your PC
- ▶ Customize views, templates, and reports to your exact needs
- ▶ Create and store a complete library of configurations that can be uploaded to the DTR[®] Model 8510 as needed
- ▶ Run tests directly from PC
- ▶ Print reports using standard or custom templates you design

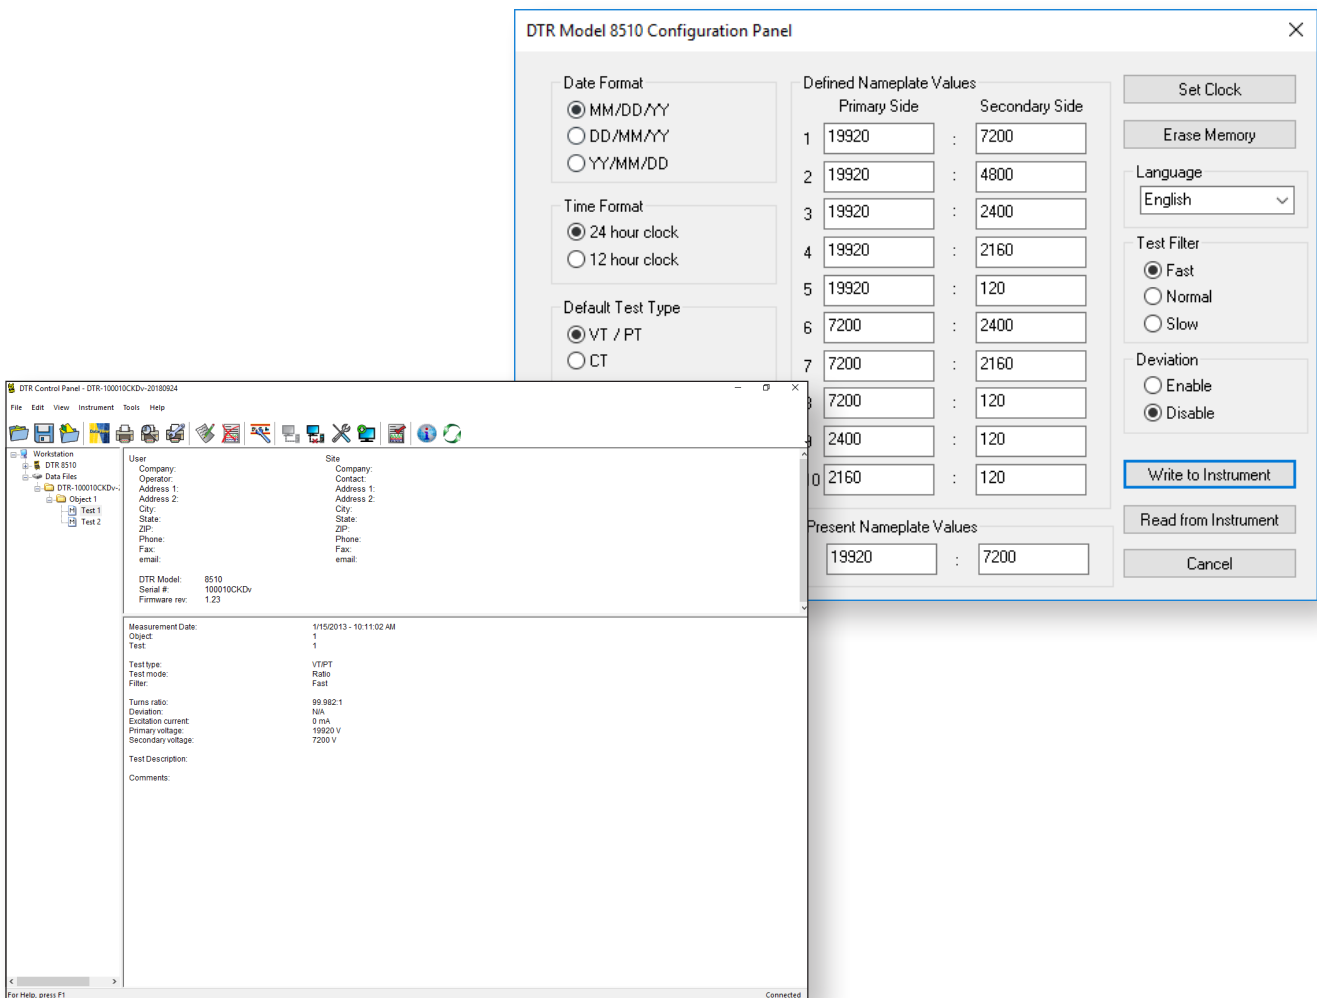

United States & Canada

**Chauvin Arnoux®, Inc.
d.b.a. AEMC® Instruments**

15 Faraday Drive
Dover, NH 03820 USA
Tel (603) 749-6434
Fax (603) 742-2346

Customer Support

Place orders, obtain prices
and delivery options

(800) 343-1391

customerservice@aemc.com

Sales & Marketing Department

sales@aemc.com

marketing@aemc.com

United States & Canada (continued)

Repair & Calibration Service

repair@aemc.com

**Technical & Product
Application Support**

(800) 343-1391

techsupport@aemc.com

**South America, Central America,
Mexico & the Caribbean**

Chauvin Arnoux®, Inc.

d.b.a. AEMC® Instruments

15 Faraday Drive
Dover, NH 03820 USA

export@aemc.com

Australia & New Zealand

Chauvin Arnoux®, Inc.

d.b.a. AEMC® Instruments

15 Faraday Drive
Dover, NH 03820 USA

export@aemc.com

All other countries

Chauvin Arnoux®

12-16 Rue Sarah Bernhardt
92600 Asnières-Sur-Seine, FR

Tel +1 33 1 44 85 45 85

Fax +1 33 1 46 27 73 89

info@chauvin-arnoux.com

www.chauvin-arnoux.com



Family of Products

THE SMART CHOICE

FOR ELECTRICAL TEST & MEASUREMENT INSTRUMENTS

To learn more, visit www.aemc.com

Call the AEMC® Instruments Technical Assistance Hotline for immediate consultation with an applications engineer: (800) 343-1391

AEMC® Instruments • 15 Faraday Dr. • Dover, NH 03820 USA • (800) 343-1391 • Fax (603) 742-2346 • E-mail: sales@aemc.com
Export Department: +1 (603) 749-6434 x520 • Fax +1 (603) 742-2346 • E-mail: export@aemc.com

950.BR-8510_0424 • Printed in the USA

© Chauvin Arnoux®, Inc. d.b.a. AEMC® Instruments